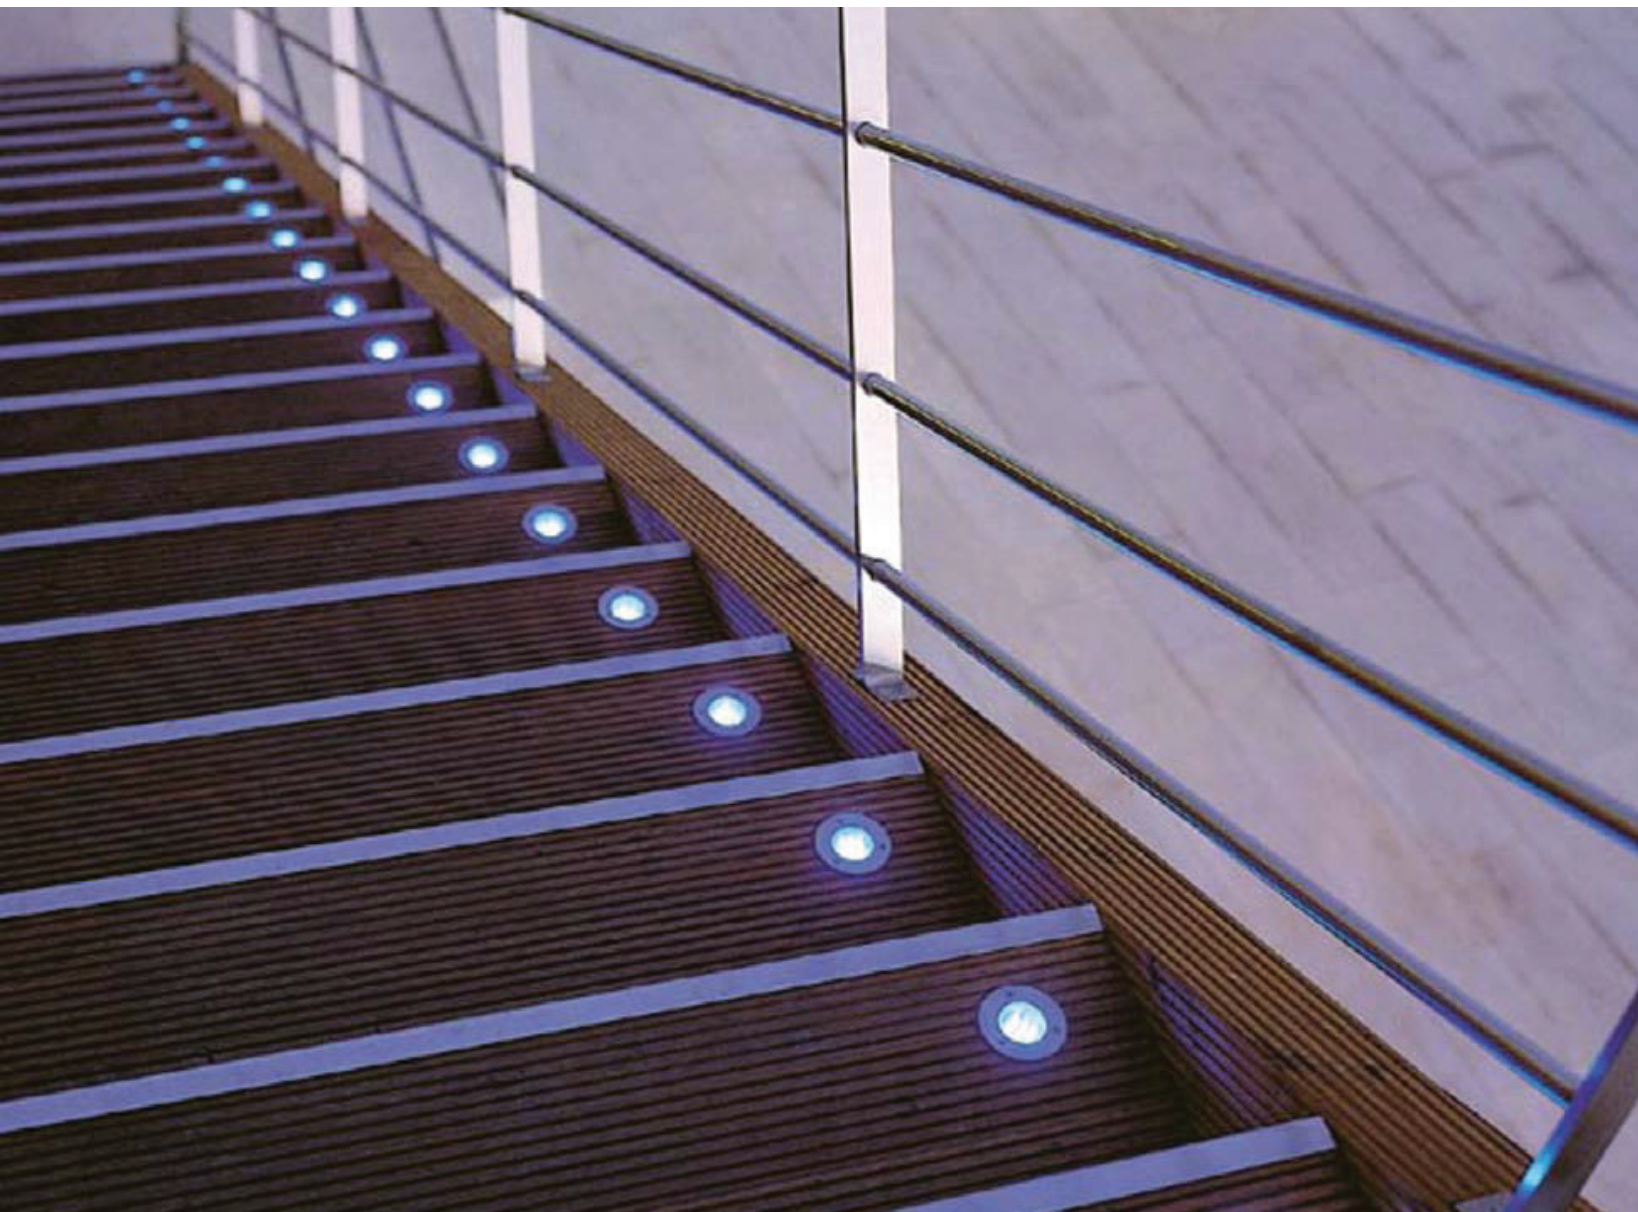



WALK OVER LED



Milet 2



CODE NO 425211 WHITE ●


CODE NO 425212 BLUE ●

CODE NO 425213 RED ●

CODE NO 425214 YELLOW ●

CODE NO 425215 GREEN ●


CLASS I IP 67

**4 x 350 mA (4 W) LED****Voltage :** 240V A.C with integrated driver


(12V AC or DC, 24V AC or DC on request)

Lens : 25° (10°, 15°, 40°, 6 X 25 elliptic on request)**Diffuser :** 4 + 4mm Tempered Glass (Frosted Glass on request)

Standard with potted 5m 3x0,75 H03 VV-F cable



Milet 4



CODE NO 425201 WHITE ●


CODE NO 425202 BLUE ●

CODE NO 425203 RED ●

CODE NO 425204 YELLOW ●

CODE NO 425205 GREEN ●


CLASS I IP 67


**3 x 350 mA (3 W) LED****Voltage :** 240V A.C with integrated driver

(12V AC or DC, 24V AC or DC on request)

Lens : 25° (10°, 15°, 40°, 6 X 25 elliptic on request)**Diffuser :** 4 + 4mm Tempered Glass (Frosted Glass on request)

Standard with potted 5m 3x0,75 H03 VV-F cable




CLASS II IP 67**Belkis I****ROUND**

CODE NO 417181	WHITE	●
CODE NO 417182	BLUE	●
CODE NO 417183	RED	●
CODE NO 417184	YELLOW	●
CODE NO 417185	GREEN	●

SQUARE



CODE NO 416241	WHITE	●
CODE NO 416242	BLUE	●
CODE NO 416243	RED	●
CODE NO 416244	YELLOW	●
CODE NO 416245	GREEN	●

**9 x 20 mA LIGHTING LEDS**

Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)


Diffuser : Clear Glass 4+2 mm

Aluminum Spining Recessing Tube
with Connector**ROUND**

CODE NO 417711	WHITE	●
CODE NO 417712	BLUE	●
CODE NO 417713	RED	●
CODE NO 417714	YELLOW	●
CODE NO 417715	GREEN	●

SQUARE


CODE NO 416251	WHITE	●
CODE NO 416252	BLUE	●
CODE NO 416253	RED	●
CODE NO 416254	YELLOW	●
CODE NO 416255	GREEN	●


**9 x 20 mA BACKLIGHTING LEDS**

Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)

Diffuser : Clear Glass 4+2 mm

Aluminum Spining Recessing Tube
with Connector

CLASS II IP 67**Belkis I**

ROUND

ROUND


CODE NO 418101 WHITE ●

CODE NO 418102 BLUE ●

CODE NO 418103 RED ●

CODE NO 418104 YELLOW ●

CODE NO 418105 GREEN ●

**9 x 20 mA BACKLIGHTING LEDS**



Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)


Diffuser : Clear Glass 4+2 mm

Available with springs for false ceiling.

Plastic Recessing Box



INOX

**INOX**



CODE NO 418111 WHITE ●

CODE NO 418112 BLUE ●

CODE NO 418113 RED ●

CODE NO 418114 YELLOW ●

CODE NO 418115 GREEN ●


**1 x 20 mA BACKLIGHTING LEDS**

Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)


Diffuser : Clear Glass 4+2 mm

Plastic Recessing Box



Standard with 5m 2x0.75 H 03 VV-F cable


Available with springs for false ceiling.

CLASS II IP 67**Belkis I****ALUM**

CODE NO 416261	WHITE	●
CODE NO 416262	BLUE	●
CODE NO 416263	RED	●
CODE NO 416264	YELLOW	●
CODE NO 416265	GREEN	●

INOX

CODE NO 416271	WHITE	●
CODE NO 416272	BLUE	●
CODE NO 416273	RED	●
CODE NO 416274	YELLOW	●
CODE NO 416275	GREEN	●



**9 x 20 mA LIGHTING LEDS**

Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)


Plastic Recessing Box

Standard with 5m 2x0.75 H 03 VV-F cable
Available with springs for false ceiling.**ALUM**

CODE NO 417191	WHITE	●
CODE NO 417192	BLUE	●
CODE NO 417193	RED	●
CODE NO 417194	YELLOW	●
CODE NO 417195	GREEN	●

INOX

CODE NO 417201	WHITE	●
CODE NO 417202	BLUE	●
CODE NO 417203	RED	●
CODE NO 417204	YELLOW	●
CODE NO 417205	GREEN	●


**9 x 20 mA BACKLIGHTING LEDS**

Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)




Diffuser : Clear Acrylic (Not for walk-over)

Plastic Recessing Box

Standard with 5m 2x0.75 H 03 VV-F cable
Available with springs for false ceiling.

CLASS II IP 67

Belkis I



ALUM

CODE NO 407501 WHITE ●

CODE NO 407511 BLUE ●

CODE NO 407521 RED ●

CODE NO 407531 YELLOW ●

CODE NO 407541 GREEN ●

INOX

CODE NO 417351 WHITE ●

CODE NO 417352 BLUE ●

CODE NO 417353 RED ●

CODE NO 417354 YELLOW ●

CODE NO 417355 GREEN ●


1 x 20 mA BACKLIGHTING LEDS



Voltage: 240V A.C

(12V AC or DC, 24V AC
or DC on request)

Diffuser: Clear Acrylic (Not for walk-over)

Plastic Recessing Box

Standard with 5m 2x0.75 H 03 VV-F cable
Available with springs for false ceiling.



MULTI

CODE NO 406501 WHITE ●

CODE NO 406511 BLUE ●

CODE NO 406521 RED ●

CODE NO 406531 YELLOW ●

CODE NO 406541 GREEN ●


8 x 20 mA LEDS

Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)



Diffuser : Clear Acrylic

Plastic Recessing Box
For Concrete



Standard with 5m 2x0.75 H 03 VV-F cable



CLASS II IP 67**Belkis I****MONO**

CODE NO 406101 WHITE ●

CODE NO 406111 BLUE ●

CODE NO 406121 RED ●

CODE NO 406131 YELLOW ●


CODE NO 406141 GREEN ●

2 x 20 mA LEDS



Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)

Diffuser : Clear Acrylic

Plastic Recessing Box
For Concrete

Standard with 5m 2x0.75 H 03 W-F cable

**DUAL**

CODE NO 406301 WHITE ●

CODE NO 406311 BLUE ●

CODE NO 406321 RED ●

CODE NO 406331 YELLOW ●

CODE NO 406341 GREEN ●


CODE NO 406391 GREEN+RED ●● *(Special application)

2+2 x 20 mA LEDS


Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)

Diffuser : Clear Acrylic

Plastic Recessing Box
For Concrete

Standard with 5m 2x0.75 H 03 W-F cable

CLASS II IP 67**Belkas 2****ROUND**

CODE NO 417491 WHITE ●

CODE NO 417492 BLUE ●

CODE NO 417493 RED ●

CODE NO 417494 YELLOW ●

CODE NO 417495 GREEN ●

SQUARE


CODE NO 417501 WHITE ●

CODE NO 417502 BLUE ●

CODE NO 417503 RED ●

CODE NO 417504 YELLOW ●


CODE NO 417505 GREEN ●

**18 x 20 mA LIGHTING LEDS**


Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)

Diffuser : Clear Glass 4+2 mm

Aluminum Spining Recessing Tube
with Connector

Standard with 5m 2x0.75 H 03 VV-F cable

**ROUND**

CODE NO 417721 WHITE ●

CODE NO 417722 BLUE ●

CODE NO 417723 RED ●

CODE NO 417724 YELLOW ●

CODE NO 417725 GREEN ●

SQUARE


CODE NO 417731 WHITE ●

CODE NO 417732 BLUE ●

CODE NO 417733 RED ●

CODE NO 417734 YELLOW ●


CODE NO 417735 GREEN ●

**18 x 20 mA BACKLIGHTING LEDS**



Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)

Diffuser : Clear Glass 4+2 mm

Aluminum Spining Recessing Tube
with Connector

Standard with 5m 2x0.75 H 03 VV-F cable



INOX

CODE NO 418121 WHITE ●

CODE NO 418122 BLUE ●

CODE NO 418123 RED ●


CODE NO 418124 YELLOW ●

CODE NO 418125 GREEN ●

18 x 20 mA BACKLIGHTING LEDS Plastic Recessing Box for Concrete

Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)





Diffuser : Clear Glass 4+2 mm

Standard with 5m 2x0.75 H 03 VV-F cable

Available with springs for false ceiling.



CLASS II IP 67**Belkis 2****MONO**

CODE NO 416321 WHITE ●

CODE NO 416322 BLUE ●

CODE NO 416323 RED ●

CODE NO 416324 YELLOW ●

CODE NO 416325 GREEN ●




2 x 20 mA LEDS

Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)

Diffuser : Clear Acrylic

Standard with 5m 2x0.75 H 03 VV-F cable

Aluminum Spinning Recessing Tube
with Connector**DUAL**

CODE NO 401301 WHITE ●

CODE NO 401311 BLUE ●

CODE NO 401321 RED ●

CODE NO 401331 YELLOW ●

CODE NO 401341 GREEN ●

CODE NO 401391 GREEN+RED ●●


*Special application for parking lots:
Enter (2 x green)-Do not enter (2 x red)**2+2 x 20 mA LEDS**

Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)


Diffuser : Clear Acrylic

Standard with 5m 2x0.75 H 03 VV-F cable

Aluminum Spinning Recessing Tube
with Connector

CLASS II IP 67

Belkis 2



MULTI

CODE NO 401501	WHITE	●
CODE NO 401511	BLUE	●
CODE NO 401521	RED	●
CODE NO 401531	YELLOW	●
CODE NO 401541	GREEN	●


12x 20 mA LEDS

Voltage : 240V A.C

(12V AC or DC, 24V AC
or DC on request)

Diffuser : Clear Acrylic

Aluminum Spinning Recessing Tube
with Connector



Standard with 5m 2x0.75 H 03 VV-F cable